


X-ray tomographic micro-particle velocimetry in porous media

Cite as: Phys. Fluids **34**, 042008 (2022); <https://doi.org/10.1063/5.0088000>

Submitted: 11 February 2022 • Accepted: 20 March 2022 • Published Online: 06 April 2022

 T. Bultreys,  S. Van Offenwert,  W. Goethals, et al.

COLLECTIONS

 This paper was selected as Featured



View Online



Export Citation



CrossMark

ARTICLES YOU MAY BE INTERESTED IN

[Study on the interfacial dynamics of free oscillatory deformation and breakup of single-core compound droplet](#)

Physics of Fluids **34**, 042009 (2022); <https://doi.org/10.1063/5.0087738>

[Recent advances in theory, simulations, and experiments on multiphase flows](#)

Physics of Fluids **34**, 040401 (2022); <https://doi.org/10.1063/5.0091696>

[Swelling, softening, and elastocapillary adhesion of cooked pasta](#)

Physics of Fluids **34**, 042105 (2022); <https://doi.org/10.1063/5.0083696>

APL Machine Learning

Open, quality research for the networking communities

Now Open for Submissions

LEARN MORE



X-ray tomographic micro-particle velocimetry in porous media

Cite as: Phys. Fluids **34**, 042008 (2022); doi: [10.1063/5.0088000](https://doi.org/10.1063/5.0088000)

Submitted: 11 February 2022 · Accepted: 20 March 2022 ·

Published Online: 6 April 2022



View Online



Export Citation



CrossMark

T. Bultreys,^{1,2,a)}  S. Van Offenwert,^{1,2}  W. Goethals,^{1,3}  M. N. Boone,^{1,3}  J. Aelterman,^{1,3,4}  and V. Cnudde^{1,2,5} 

AFFILIATIONS

¹Centre for X-ray Tomography, Ghent University, Proeftuinstraat 86, 9000 Ghent, Belgium

²Department of Geology, Ghent University, Krijgslaan 281, 9000 Ghent, Belgium

³Department of Physics and Astronomy, Ghent University, Proeftuinstraat 86, 9000 Ghent, Belgium

⁴Department of Telecommunications and information processing—IMEC, Ghent University, Sint-Pietersnieuwstraat 41, 9000 Ghent, Belgium

⁵Department of Earth Sciences, Environmental Hydrogeology, Utrecht University, Princetonlaan 8A, 3584 CS Utrecht, The Netherlands

^{a)} Author to whom correspondence should be addressed: Tom.Bultreys@UGent.be

ABSTRACT

Fluid flow through intricate confining geometries often exhibits complex behaviors, certainly in porous materials, e.g., in groundwater flows or the operation of filtration devices and porous catalysts. However, it has remained extremely challenging to measure 3D flow fields in such micrometer-scale geometries. Here, we introduce a new 3D velocimetry approach for optically opaque porous materials, based on time-resolved x-ray micro-computed tomography (CT). We imaged the movement of x-ray tracing micro-particles in creeping flows through the pores of a sandpack and a porous filter, using laboratory-based CT at frame rates of tens of seconds and voxel sizes of 12 μm . For both experiments, fully three-dimensional velocity fields were determined based on thousands of individual particle trajectories, showing a good match to computational fluid dynamics simulations. Error analysis was performed by investigating a realistic simulation of the experiments. The method has the potential to measure complex, unsteady 3D flows in porous media and other intricate microscopic geometries. This could cause a breakthrough in the study of fluid dynamics in a range of scientific and industrial application fields.

Published under an exclusive license by AIP Publishing. <https://doi.org/10.1063/5.0088000>

I. INTRODUCTION

Fluid dynamics in porous materials play an important role in nature and in industry, e.g., groundwater flow in aquifers (Mercer and Cohen, 1990), gas-brine flow in geological energy, or carbon storage reservoirs (Mouli-Castillo *et al.*, 2019 and Bui *et al.*, 2018), and the performance of filtration devices, fuel cells, and catalysts (Miele, Anna, and Dentz, 2019 and Mularczyk *et al.*, 2020). The intricate pore geometries in such materials can lead to complex phenomena, particularly during solute and colloid transport (Zhang *et al.*, 2021; Haffner and Mirbod, 2020; and Russell and Bedrikovetsky, 2021), multiphase flows (Blunt, 2017 and Singh *et al.*, 2019), and non-Newtonian flows (An *et al.*, 2022). While experiments on simplified (often 2D) model geometries give valuable insights into flow behavior in the confinement of generic pore walls (Primkulov *et al.*, 2019; Lenormand, Zarcone, and Sarr, 1983; Holtzman, 2016; and Datta, Dupin, and Weitz, 2014a), the physical interactions in the complex 3D pore networks encountered in

many applications remain difficult to probe. This is important as highly irregular pore geometry and connectivity are known to influence the emerging behavior at the macro-scale in a non-trivial way, due to the non-linearity of many flow processes in porous media (Mascini *et al.*, 2021; Ling *et al.*, 2017; and McClure, Berg, and Armstrong, 2021). Recent pore-scale numerical simulation methods can—to a certain extent—be applied to study these porous media, but often still come with significant uncertainties on the incorporated physical assumptions and material properties (Zhao *et al.*, 2019 and Ye *et al.*, 2019). Furthermore, such methods are in many cases severely restricted by either the computational time, domain size, or accuracy. There is thus an important need for *in situ* experimental measurements to study 3D porous media flows at the scale of the flow-confining pore geometries (nm–mm).

For the wider field of experimental fluid mechanics, the introduction of methods to measure 3D flow and pressure fields has been a turning point, as reviewed by Discetti and Coletti (2018). However,

this has not been applicable to a majority of porous materials of interest to the research community, due to the optical opacity of these materials. Most flow field measurements are based on optical particle velocimetry (PV), using visible light to image the movement of flow-tracing particles in (index-matched) fluids over time. With micro-particles and microscopes, this principle can be used to measure micrometer-scale flow fields in transparent 2D micromodels (Roman *et al.*, 2015 and Zarikos *et al.*, 2018) and even in optically transparent 3D porous media, using multi-camera setups (Schanz, Gesemann, and Schröder, 2016), astigmatic optics (Franchini *et al.*, 2019), or confocal microscopy (Datta *et al.*, 2013 and Datta, Ramakrishnan, and Weitz, 2014b). However, these techniques are inherently unsuited for optically opaque—and thus most—porous materials. An alternative method is to measure fluid propagators using (pulsed-field gradient) magnetic resonance imaging (Gladden and Sederman, 2013). While having several advantages, including not requiring tracers, this method has only recently started to reach the required micrometer-scale spatial resolutions (de Kort *et al.*, 2019). Several hours are required to measure a single flow field at this resolution, restricting its applicability to static flow fields.

In this paper, we introduce a 3D micro-particle velocimetry method for porous media by leveraging the penetrating power of x-rays. Contrary to previous methods, the approach is applicable to tortuous, spatially varying 3D flow fields common in porous media, and can be extended to unsteady flows. Prior approaches to x-ray based particle velocimetry started with 2D, radiography-based measurements, which did not yield 3D information (Lee and Kim, 2003). This was followed by methods that reconstructed 3D flow fields from correlations within radiography sequences, taken from different viewing angles (Fouras *et al.*, 2007; Dubsy *et al.*, 2012; and Baker *et al.*, 2018). While high particle velocities could be measured because radiographs can be acquired mere milliseconds apart, these methods have only been applied to fairly homogeneous flows in, e.g., a blood vessel, and it is unclear how well suited their reconstruction algorithms are to complex flow fields in porous media. The alternative method we adopt here is x-ray micro-computed tomography (CT), an inherently 3D, nondestructive and micrometer-scale technique (Cnudde and Boone, 2013 and Wildenschild and Sheppard, 2013), to reconstruct a time series of 3D images of flow-tracing particles. The challenge is to precisely resolve the locations of the tracer particles at a sufficiently high frame rate. For their motion to be representative of the flow, these particles should be small and close in mass density to the liquid to negate inertial and gravitational effects. However, this tends to negatively affect the particles' visibility in x-ray imaging. Furthermore, CT imaging typically takes tens of minutes to acquire a 3D image, which is too slow to track the particle movement. Time resolutions on the scale of (tens of) seconds have only become possible at synchrotrons a few years ago (Berg *et al.*, 2013) and even more recently in laboratory-based CT scanners (Bultreys *et al.*, 2016).

Very recently, Mäkiharju *et al.* (2022) provided a proof-of-concept that flow tracer particles (60 μm large silver-coated hollow glass spheres) in a cylindrical tube could be visualized with laboratory-based CT at frame rates on the order of seconds. Here, we present the first successful CT-based particle velocimetry measurements of creeping single-phase flow in porous media, namely a sandpack and a sintered glass filter. Our method yields fully 3D, three-component velocity fields, by tracing the movement of thousands of individual silver-

coated micro-spheres with a mean diameter of approximately 20 μm . The measurements were performed using a laboratory-based CT scanner at a voxel size of 12 μm and an acquisition time of 70 s per scan, with a total measurement time of 30–45 min.

In the following, we first introduce the basic concepts of particle tracking velocimetry (PTV) in Sec. II A. The experimental workflow is described in Sec. II B. We used a Lagrangian particle tracking approach to identify individual particle trajectories in the image and interpolated the resulting velocity data points to find velocity fields, as explained in Sec. II C. The method was validated on a realistic numerical simulation of an imaging experiment, which provided ground-truth data to validate particle locations and velocities. The generation of this dataset is treated in Sec. II D. The results of the experiments and the validation are discussed in Sec. III.

II. MATERIALS AND METHODS

A. Introduction to particle tracking velocimetry

Particle velocimetry (PV) methods work by computing the displacement of flow tracer particles in a time series of images. Before introducing specific approaches, it is useful to discuss the following general considerations when selecting or applying these methods:

- The *sampling density* of the resulting velocity field is the density of the cloud of points in which particles were detected and velocities could thus be measured. This has the potential to improve with longer measurement time or denser particle seeding, as well as with the resolution of the particle images.
- The *measurement time* refers to the time needed to acquire all the data to reconstruct a velocity field. This determines whether changes in (unsteady) flows over time can be measured.
- The *frame interval* is the time interval between consecutive particle images (frames). To track the paths of fast-moving particles, this time interval needs to be small enough.
- The *acquisition time* is the time to acquire a single frame. This needs to be small enough to accurately measure the particle positions, as their motion would otherwise cause blurring and other image artifacts. In optical imaging, the frame interval is larger than or equal to the acquisition time, but in our method this is not necessarily the case, as discussed in Sec. II B.
- The *particle seeding concentration* is the amount of particles in a unit volume of liquid. Higher concentrations can improve the spatial or temporal resolution, but come at the cost of higher computational complexity. In porous media, high seeding concentrations may also induce pore clogging.
- The *tracer fidelity* refers to the need for good flow tracers to follow the flow lines of the liquid, rather than be significantly influenced by inertia or gravity. Particles should thus have a small Stokes number and a small ratio of gravitational settling velocity to flow velocity (Melling, 1997). This depends on the liquid's viscosity and on the size and material density of the particles.

There are two main classes of approaches to PV. The first and most well-known, particle image velocimetry (PIV), yields a flow field from as little as two snapshots of the particles, by dividing the images into small windows that typically contain multiple particles, and investigating correlations between these windows in consecutive time steps (Raffael *et al.*, 2018). Particle tracking velocimetry (PTV, also called Lagrangian Particle Tracking), on the other hand, identifies the

locations of individual particles as they travel throughout many images. PIV tends to have a better temporal resolution because it requires fewer particle images and deals better with high seeding concentrations, while PTV yields more precisely localized velocity information, as well as Lagrangian properties of the flow (Ouellette, Xu, and Bodenschatz, 2006).

In this work, we employ PTV, for two main reasons. First, we aim to measure flows in geometries bound by irregular pore walls, which means that the spatial discretization of PIV into interrogation windows may cause issues. Second, out of concern to avoid significant pore clogging by particle straining (Molnar *et al.*, 2015), we have kept the seeding concentrations relatively low—making PTV the more favorable option.

B. Experiments

In the following, we first describe how the flow experiments were performed and then provide a detailed description of the tracer particle suspension used in these experiments, which consisted of silver-coated hollow glass spheres in a highly viscous glycerol–water mixture.

1. Flow experiments

We present velocimetry experiments on two porous samples: a sand pack and a porous glass filter. The first sample was a construction-grade sand used in mortars (HUBO, Belgium), sieved to retain the fraction of grains between 500 and 710 μm . The grains were poured into a viton sleeve of 4 mm diameter mounted in a flow cell, to a sample height of approximately 20 mm. The second was a cylindrical sintered glass filter of 4 mm diameter and 10 mm height, with nominal pore sizes between 160 and 250 μm (ROBU P0, Germany), in a viton sleeve. Image-based estimates of the porosity and mean pore (throat) sizes of the samples are listed in Table I. Both samples were mounted into a vertically oriented, x-ray transparent Hassler-type flow cell (RS Systems, Norway). We avoided flow from bypassing the sample by pressurizing the sleeve around the samples with a confining pressure of 2 MPa. The liquids were injected from the bottom to the top of the samples. The flow cell was mounted on the environmental CT scanner (EMCT) at Ghent University’s Center for x-ray Tomography: a fast-scanning system which does not rotate the sample like most CT scanners, but instead rotates a source-detector system on a gantry around it. A detailed description of the scanner and its application to fast imaging can be found in Dierick *et al.* (2014) and Bultreys *et al.* (2016). A schematic of the setup is shown in Fig. 1.

Before the velocimetry experiment, the samples were saturated with the unseeded glycerol–water liquid by flooding more than 50 pore volumes of liquid through the sample at a high flow rate, namely a Darcy velocity (fluid flux) of 2 mm/s, to mobilize trapped air. Then, a high-quality CT scan at 6 μm voxel size was made of the field-of-view of the experiment: a section of the sample near the inlet, approximately 6.3 mm high and containing its full diameter (2200 projections, 110 kV accelerating voltage, 8 W x-ray power, 550 ms integrated exposure time per projection).

To start the experiment, the tracer particle suspension was drawn up in high-precision glass syringes (Hamilton GasTight Syringe models 1001 and 1002) and injected into the sample at the flow rates listed in Table I, using a Harvard PHD ultra syringe pump (Harvard). The tracers were injected from the bottom-side of the sample, via PTFE

TABLE I. Key experimental properties for the velocimetry experiments. Mean pore and throat sizes were based on the open-source pore network extraction algorithm PNExtract (Raeni, Bijeljic, and Blunt, 2017). Glycerol–water properties were based on tabulated data (Segur and Oberstar, 1951 and Takamura, Fischer, and Morrow, 2012).

Experiment	Sand pack	Porous glass
Sample		
Mean pore size (μm)	172	163
Mean throat size (μm)	95	78
Image-based porosity (%)	34.1	27.5
Tracer suspension		
Glycerol concentration (wt. %) in water	95	93
Viscosity (cP)	523	367
Liquid mass density (g/ml)	1.247	1.242
Seeding concentration (mg/g)	8	12
Flow properties		
Flow rate (nl/min)	33	44
Interstitial velocity (nm/s)	128	212
Interstitial velocity (voxel/time frame)	0.38	0.62
Gravitational settling for mean tracer size (nm/s)	59	85
Imaging settings		
Number of (interleaved) time frames	80	60
CT voxel size (μm)	11.8	
CT image size (voxels)	658 × 658 × 539	
Acquisition time 3D images (s)	70	
Frame interval 3D images (s)	35	

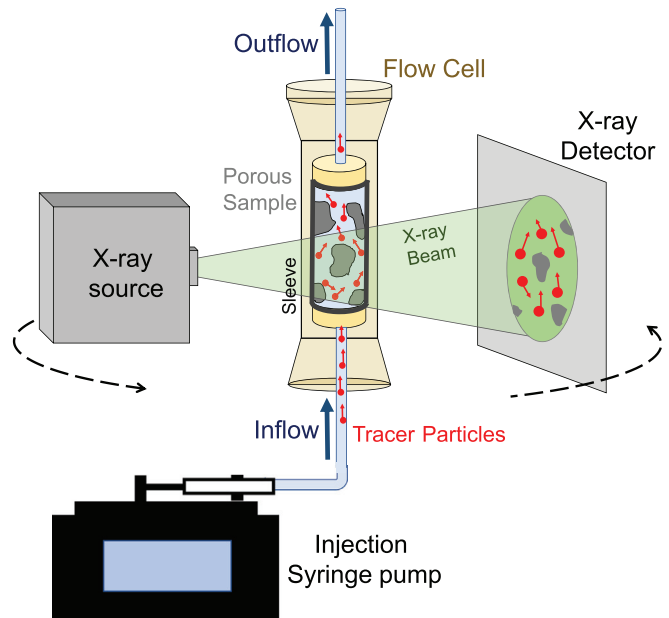


FIG. 1. A schematic of the experimental setup used in this work (not drawn to scale). The samples were 4 mm in diameter and 10–20 mm high.

tubing. The imposed constant volumetric flow rates in the experiments were set to arrive at an estimated average interstitial velocity around 1 voxel per scanner rotation (0.5 voxels/frame due to the interleaved reconstruction procedure explained below). These rates were at least ten times larger than the minimum setting of the syringe pump, ensuring smooth flow. The pump accuracy and reproducibility were, respectively, 0.25% and 0.05%. After assessing that the tracer particles were present in the sample by radiography, continuous CT acquisitions of either 30 or 40 back-to-back rotations were started, at 70 s per full rotation and 11.8 μm voxel size (700 projections/rotation, 100 ms exposure time, 60 kV accelerating voltage, and 8 W x-ray power).

After the experiment, the data were reconstructed into time series of 3D frames using a filtered back projection algorithm (Tescan XRE, Belgium), taking 700 projections per frame and 350 projections in between each two frames. This resulted in an “interleaved” time series with a frame interval of 35 s and an acquisition time of 70 s. An intuitive way to understand the resulting data is to compare it to an interleaved stream of images from two cameras with staggered trigger time, so that the exposures of each two consecutive frames overlap by 50%. This reduced the maximum distance traveled by a particle between two consecutive frames, which was beneficial for the particle tracking algorithm.

Minor amounts of particle retention were found during visual inspection of cross-sectional slices of the reconstructed images (e.g., Fig. 12 in the Appendix) and were deemed to have a limited effect on the velocimetry results as pore clogging was negligible. However, this issue did cause several failed experimental trials during the method’s development. Its effects typically became severe after pumping a few pore volumes (i.e., tens of L) of the tracer-seeded liquid through the imaged part of the sample. During both experiments, which took, respectively, 46 and 35 min for the sandpack and the porous glass filter, only 1.5 L of liquid (approximately 5% of the imaged pore volume) was pumped. Carefully timing the arrival of the tracers with the start of the acquisition was thus key. This was achieved by inspecting the sample with radiography during particle delivery while remotely controlling the pump. Note that the risk of tracer retention can be significantly reduced by decreasing their particle size compared to the pore-throat size. While a systematic study of the minimum pore throat-tracer size ratio needed to perform velocimetry experiments is out of the scope of this study, preliminary tests did show significant clogging in samples where the mean pore-throat size was close to the mean tracer particle diameter. As a reasonable working hypothesis, we assumed that the maximum tracer size (here: 60 μm , see Sec. II) should be smaller than the typical pore-throat size of the main flow paths, which we estimated by the mean pore-throat size in Table I. Successfully resolving smaller particles could be achieved by increasing the spatial resolution of the images without impacting the image quality or the temporal resolution (e.g., using synchrotron CT).

2. Particle-liquid system

The flow tracing particles were hollow glass microspheres with a nominal particle size range between 5 and 22 μm and a 250 nm thick silver coating, resulting in a particle mass density of 1.4 g/ml (Cospheric). We measured the particle size distribution of the tracer with a laser diffraction particle sizer (Malvern MasterSizer 3000, UK), indicating a mean size of 19.3 μm and the occurrence of larger sizes

than the nominal range, up to 60 μm (Fig. 2). For the velocimetry experiments, the tracer particles were suspended in high-viscosity mixtures of glycerol and water, with 93–95 wt. % glycerol. The silver coating had a high x-ray attenuation coefficient due to its high atomic number, providing a beneficial contrast with the liquid in the images, contrary to what can be expected from traditional micro-velocimetry particles such as polyethylene microspheres.

The high-viscosity liquids caused a strong drag force on the particles, preventing that their inertia would cause deviations from the liquid’s flow lines (Stokes numbers were of the order of 10^{-10} or smaller). Furthermore, the viscosity reduced the speed of gravitational settling. The terminal sinking velocity for a sphere with radius R can be calculated using Stokes’ law

$$v = \frac{2 \rho_s - \rho_f}{9 \mu} g R^2 \tag{1}$$

with ρ_s and ρ_f the mass densities of, respectively, the particle and the fluid, μ the viscosity, and g the gravitational acceleration (the values of these material properties are listed in Table I). In the experiments, the estimated interstitial velocity (based on the imposed volumetric flow rate) was two to three times higher than the settling velocity for the mean particle size (Table I). In the respective experiments, particles larger than 28.5 and 27.5 μm were expected to have gravitational velocities equal to or larger than the flow velocity. Note that the largest of these particles may never reach the sample through the vertical tubing below the flow cell. Nevertheless, gravitational settling may thus still lead to an underestimation in the vertical component (along the Z-axis) of the velocity field. However, this issue can be reduced by using smaller or lighter particles, or faster interstitial velocities, as the imaging methods become more powerful.

The particles were added to the liquid with a seeding concentration of 8 or 12 mg/g (estimated 5.5 or 8.3×10^6 particles per ml of liquid, which translates to 0.009 or 0.014 particles per voxel). This was based on trial-and-error and may be further adapted: increasing the seeding concentration may lead to lower measurement times, while decreasing it may reduce clogging due to jamming effects in cases

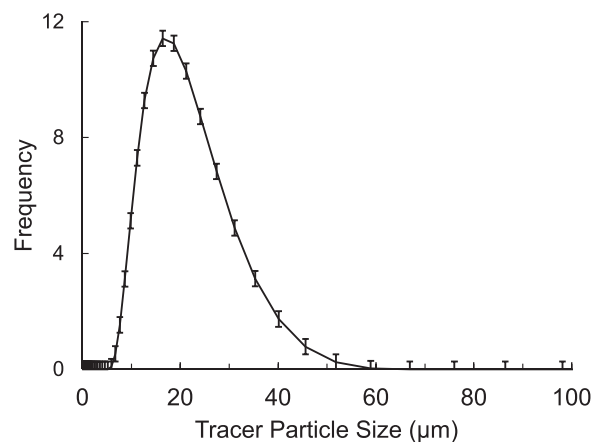


FIG. 2. We measured the size distribution of the silver coated hollow glass spheres that were used as tracer particles in the experiments with laser diffraction. The error bars reflect the standard deviation on five measurements.

where this causes issues. The suspension was first vigorously stirred, then treated with an ultrasonic homogenizer (Hielscher UP50H, Germany) for 5 min, and placed in an ultrasonic bath (Bandelin Sonorex TK52, Germany) for 10 min to disperse the particles and remove air bubbles, respectively. The particle dispersion was slightly less successful in the sand pack experiment, likely due to technical issues with the ultrasonic equipment.

C. Image processing and velocimetry analysis

1. Particle tracking algorithm

To track trajectories of individual particles in the time series of 3D CT frames acquired during the experiment, particles were first detected in each time step image, and these detections were then associated between time steps to result in particle tracks. A multitude of methods to do this are compared in [Chenouard et al. \(2014\)](#). In this work, we used the Crocker and Grier method implemented in the open-source Python package TrackPy ([Crocker and Grier, 1996](#) and [Allan et al., 2021](#)). First, the background was subtracted from the time series images by registering and downsampling the high-quality pre-scans to the time series in Avizo (Thermo Fisher, France). Then, potential particle locations were identified as local gray value maxima in the background-subtracted images using TrackPy. Any particle detection outside of the pore space was removed by masking the experimental images with a segmentation of the pore space from the registered pre-scan (made using simple gray value thresholding in Avizo). The locations of local gray-value maxima were adopted as particle locations if no voxels within a *minimum particle separation distance* of 4 voxels had a higher gray value than that maximum, and if they lied within the brightest 2% of gray values in the pore space. These values were set by visual inspection of the particle identifications in the images. The particle locations were then refined to a sub-voxel accuracy by calculating the brightness-weighted centroid of the voxels in a neighborhood around the peak value. Finally, noisy particle detections with very low brightness-weighted mass were removed.

A location-prediction based nearest-neighbor algorithm was used to identify which particle observation in a certain frame most likely corresponded to a certain observation in the previous frame ([Crocker and Grier, 1996](#)). For each particle, the local velocity was estimated from three prior time steps to predict its new location in each time step (the displacement was initialized to a user-defined value in the first time step). The observation nearest to this predicted location was then taken as the particle's new location. To keep the calculations tractable, a maximum search range of 6 voxels around the predicted location was set to limit the amount of potential matches. The association step would therefore become more challenging if the average displacement between time frames were to be larger or if the particle seeding density were to be increased. It should be noted that more advanced methods than the nearest-neighbor approach have been developed, relying on, e.g., multiple hypothesis tracking or Kalman filtering ([Jaqaman et al., 2008](#); [Chenouard et al., 2014](#); and [Godinez and Rohr, 2015](#)). These methods are computationally more demanding, but may be of benefit in experiments with larger particle displacements or seeding densities than the ones presented here. The current analysis took less than 1 h to treat a full experimental dataset, running on the CPU of a moderately sized workstation (Intel Core i7-8700 with 64 GB RAM).

2. Velocity field interpolation and comparison to computational fluid dynamics

After identifying particle trajectories, those that were only a few time steps long were removed, as these typically contained noisy detections. In both experiments, a minimum trajectory span of 20 frames was set. Particle velocity vectors were calculated for each remaining particle track using a centered finite difference approach. The resulting cloud of velocity vectors was then linearly interpolated on a grid with the same voxel size as the experimental time step images (using SciPy), to find the 3D field of all three velocity components. To take into account that velocities should be zero in the solid material during the interpolation, zero-velocity points were added in a randomly selected fraction of the pore wall voxels (2.5%). Higher-order interpolation and adding zero-points in all boundary voxels were computationally prohibitive as the interpolation code remained to be optimized for computational efficiency.

To evaluate the measured velocity fields, we performed a cross-validation to a computational fluid dynamics (CFD) approach to calculate the velocity fields in the pore space geometry. We used an open-source finite volume solver based on OpenFOAM, from [Raeini and Blunt \(2022\)](#). The solver performed finite-volume calculations on a hexahedral mesh extracted from the segmented pre-scan of the pore space, with constant-pressure and zero-velocity-gradient boundary conditions at the in- and outlet. We used the standard code provided by [Raeini and Blunt \(2022\)](#). Note that the CFD result should not be considered as ground truth in this comparison, and differences compared to the experiments may result from both measurement errors and numerical errors ([Saxena et al., 2017](#)).

D. Simulated CT datasets for method validation

To validate the imaging and particle tracking workflow, we generated simulated CT datasets based on ground-truth particle locations. This was done by computer-generating spatial distributions of analytical spheres with specified diameters and velocities and then simulating radiographs by tracing rays from a point source to a detector array through these digital samples, with the tracer particle locations being updated in each radiograph. This way, simulated scans contained realistic geometrical deformation and motion artifacts, as particle locations changed in each radiograph (note that particle motion within individual radiographs was negligible as these are typically acquired on the ms time scale).

The validation data were meant to mimic a velocimetry experiment in a porous medium as closely as possible. To this end, we took the segmented pore geometry of the Porous Glass experiment (Sec. I) as input and determined its CFD-based velocity field (see Sec. II). The velocity field was scaled to an average velocity magnitude of 1 voxel per 360° scan. Then, to reflect the particle seeding of an incompressible flow, the initial positions of the simulated "tracer" spheres were chosen randomly in the pore space (staying clear of the in- and outlet boundaries), with sphere radii drawn from the experimentally measured tracer particle size distribution ([Fig. 2](#)). The tracer seeding density was tuned to approximate the Gaussian-like distribution of inter-particle distances from the experiment and was therefore also set to zero in regions with very low velocities (lower than 5% of the maximum). Next, the locations of these particles were calculated as they moved through the CFD-based velocity field for 4900 time steps of

100 ms, using a fourth order Runge-Kutta integration. These were the ground-truth locations for the simulated CT dataset, regardless of potential numerical errors in their determination (the purpose of the calculation being only to create ground-truth trajectories with a realistic complexity). This way, the particle positions were calculated for each radiograph time step in seven consecutive CT scans of 360° and 700 radiographs each, matching the experimental acquisition. Each of these radiographs was then calculated by raytracing using the in-house developed CTrex code (Heyndrickx *et al.*, 2020 and Schryver *et al.*, 2018). Poisson noise was added on the radiographs to match the noise level in the experiment. Finally, the simulated dataset was reconstructed with filtered back-projection. Contrary to the experiments, there was no frame interleaving in the reconstruction of the simulated datasets, to aid the interpretation and maximize the generality of the results. The simulated acquisition time and frame interval were both 70 s. The result is a time series of simulated CT images of tracer particles moving through a porous medium with exactly known trajectories, in order to investigate the errors expected in the experimental data.

III. RESULTS

A. Experimental results

Visual inspection of cross sections through the imaged porous media confirmed that tracer particles were visible as bright spots of a few voxels in diameter, which moved slowly and smoothly through the pore space (videos in the Appendix). In the sand pack, tracer particles appeared slightly larger, which may be due to particle aggregates being more difficult to disperse in the higher viscosity liquid used for this experiment. In regions with high flow rates, motion artifacts appeared to be present in the form of slightly blurred particle shapes elongated in the direction of motion, rather than as severe corkscrew-shaped artifacts and streaks which would occur in the case of large movements. The observed deformation did not necessarily cause issues in the particle localization, as this was based on the particles' gray value centroids. This will be investigated in more detail in Sec. III B.

Frame-by-frame particle detection yielded 2393 ± 86 particles per frame in the sand pack experiment and 5581 ± 136 in the porous glass. Example slices through the 3D data with annotated particle detections are shown in Fig. 3. In the ideal scenario that there is no particle agglomeration, the selected seeding concentrations would yield on average 1 particle in a cube with a side length of 4.5 (sand pack) or 4.1 voxels (porous glass). The measured average distance between neighboring particles was larger than expected due to particle agglomeration and (mainly small) particles going undetected: 9.7 and 8.0 voxels in the respective experiments.

The identified particle locations in each time frame were linked together by the nearest-neighbor algorithm, resulting in a total of 11 084 (sand pack) and 50 005 trajectories (porous glass), from which, respectively, 2490 and 4415 had the imposed minimum span of 20 time steps. 3D renderings of the filtered tracks followed tortuous paths through the pore space, as shown in Figs. 4 and 5. The velocities at each point in these tracks were calculated, yielding the velocity distributions in Fig. 6. The distributions of the X- and Y-velocity components perpendicular to the global flow direction were symmetrically distributed around zero, as expected. The mean Z-components of the measured velocities were, respectively, 0.54 and 0.70 voxel/frame for the two experiments (182 and 236 nm/s), compared to the interstitial

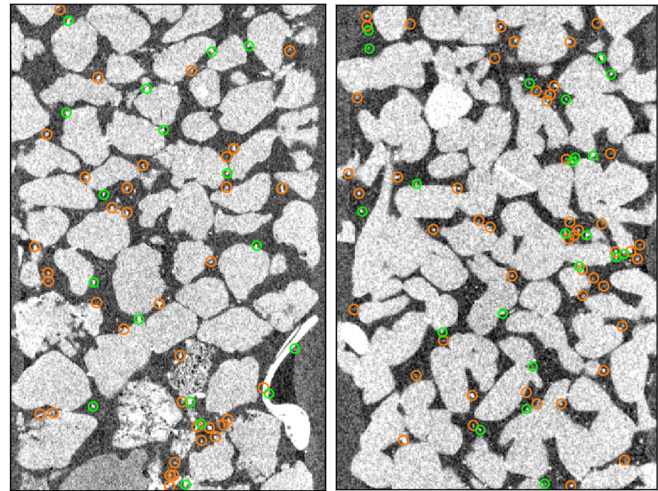


FIG. 3. This image illustrates the frame-by-frame particle detection algorithm, applied to one 3D frame of the sand pack (left) and the glass filter (right) experiment. Detections that fall in the pictured cross-sectional slice are indicated in green; detections in a directly neighboring slice are indicated in orange.

velocities of 0.38 and 0.63 voxels/frame calculated from the injection rate (Table I). This is an encouraging match, especially since the tortuosity of the pore space was not taken into account in the interstitial velocity, meaning that the real average velocity in the pores was likely a factor between 1 and 2 larger than the interstitial velocity (Fu, Thomas, and Li, 2021).

Finally, the particle velocities were interpolated to find the velocity fields on a voxel grid. In Fig. 7, we compare this to CFD simulations of the velocity field using the OpenFOAM-based solver (Raeni and Blunt, 2022) mentioned in Sec. II. The experimental measurements

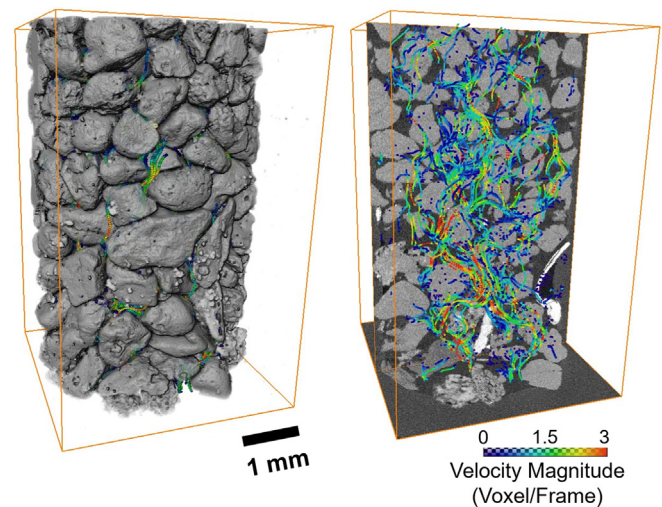


FIG. 4. Experimentally measured trajectories of tracer particles in the sand pack sample (3D rendered on the left), colored according to the velocity magnitude measured in each point (right). Only particles which could be tracked for at least 20 time frames are included.

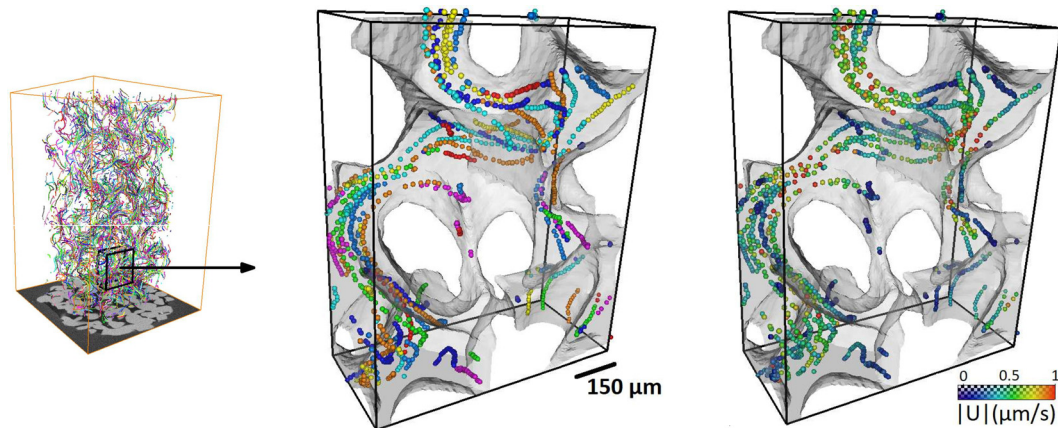


FIG. 5. A detailed view of the experimentally measured tracer trajectories in the porous glass filter sample, assigned a random color per individual particle (left and center) and colored according to the velocity magnitude $|U|$ measured in each point (right). Only trajectories that spanned at least 20 time frames are shown.

and the CFD simulations of the pore-scale velocity distributions matched well (Fig. 7). In the sand pack, mismatches close to the sample boundary may be due to inlet effects: the experimental field-of-view was selected further away from the inlet than in the porous glass filter, so that the exact inlet conditions could not be taken into account in the simulation. In the experiments, the mean distance between all measured velocity points was approximately 10 voxels, which gives an indication of the sampling density of the interpolated field. Note however that particle tracking velocimetry does not uniformly sample the

velocity field, as fewer observations are made in low-velocity regions. The sampling can be refined by acquiring more time frames.

B. Validation simulation results

Contrary to established micro-velocimetry approaches, our method used cone-beam CT data, which may suffer from specific artifacts that could impact the detection and localization of tracer particles: the geometrical deformations at the top and bottom of the

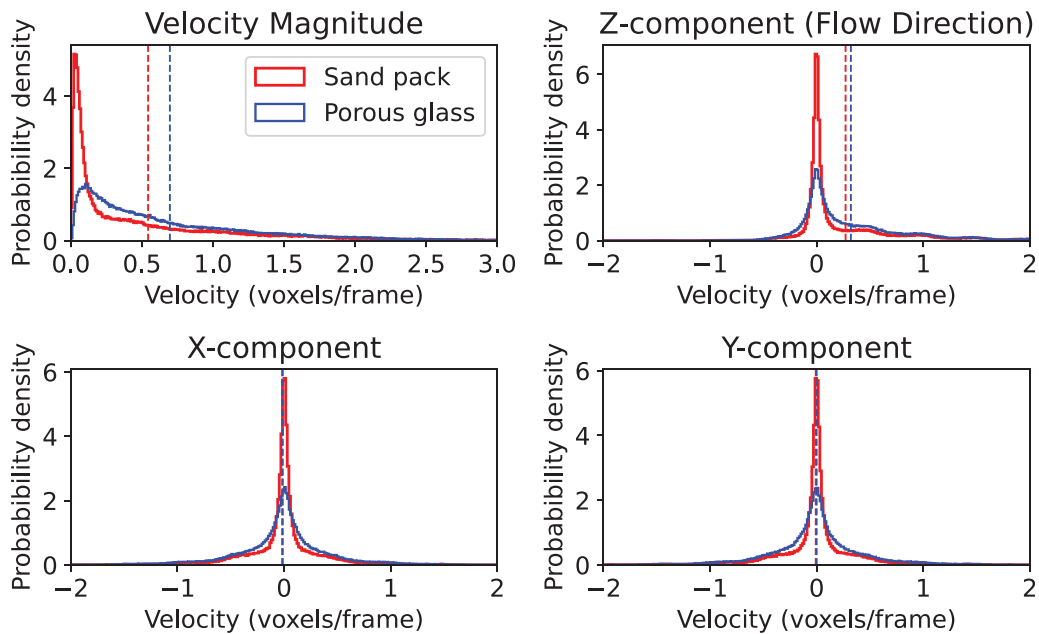


FIG. 6. Velocity distributions extracted from the experimentally-measured tracer trajectories for the two samples, indicated in voxels per frame (12 μm and 35 s, respectively). Mean velocities are indicated as dotted vertical lines. The mean velocity in the flow direction (Z) matched well with the interstitial velocity calculated from the pump rate (0.54 and 0.70 voxels/frame vs 0.38 and 0.63 voxels/frame, respectively). The velocity components orthogonal to the flow direction are distributed symmetrically around zero, as expected.

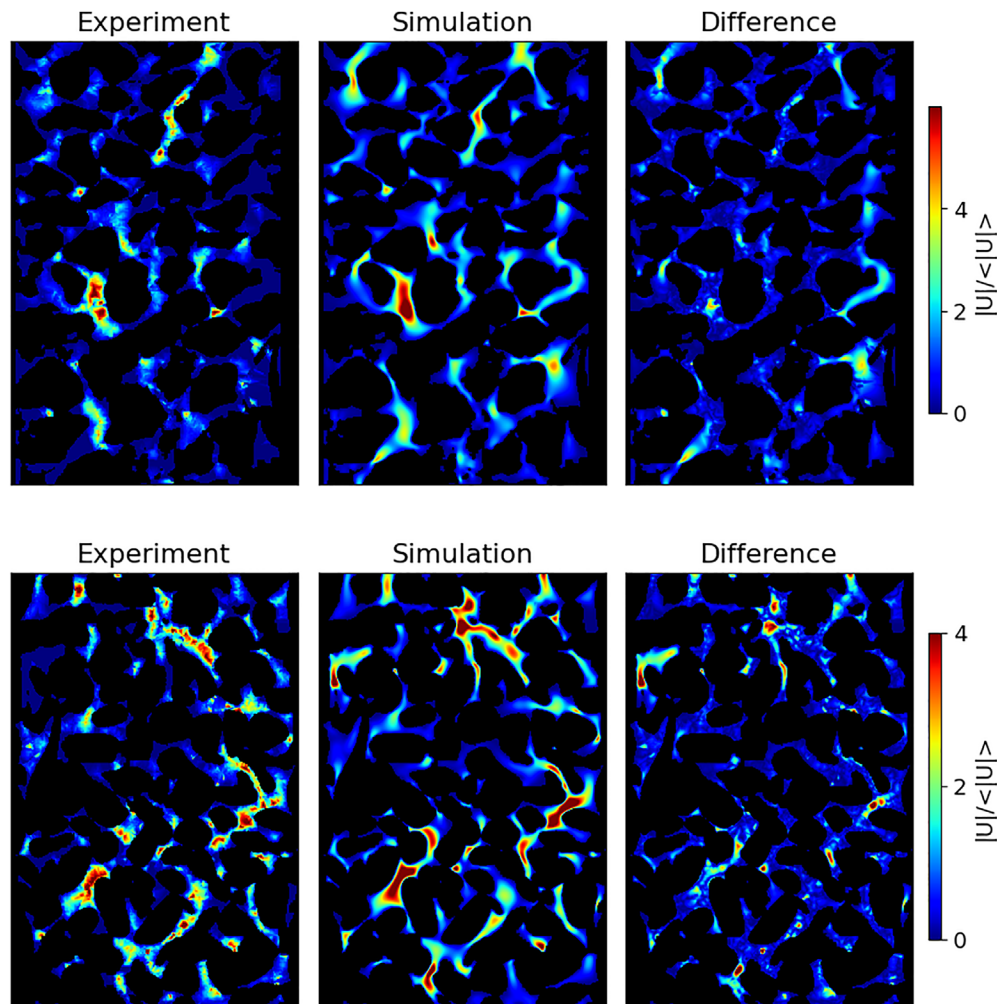


FIG. 7. Vertical cross sections through the 3D, normalized velocity magnitude fields from the sand pack (top) and the porous glass experiment (bottom) matched well with computational fluid dynamics predictions. The figures on the right shows the absolute difference between the experimental and simulated velocity fields. Mismatches close to the sample boundary in the sand pack dataset may be due to inlet effects.

volume (“cone beam artifacts”), limited spatial resolution for fast image acquisition, and motion artifacts (Cnudde and Boone, 2013 and Mäkiharju *et al.*, 2022). Since the impact of these artifacts was unclear and difficult to quantify in the experimental data, we created and analyzed a digital twin of the porous glass experiment.

Figure 8 illustrates the detection of particles in the validation dataset as a function of their size. A particle was considered to be detected if there was a detection closer than $\sqrt{3}$ voxels (a voxel diagonal) from the true position. The settings used for particle detection were the same as those used in the experiments, with exception of the intensity threshold, which was slightly modified from 98% to 98.5% to account for the fact that the experiments contained a small amount of bright particle agglomerations, which was not the case in the simulations. In total, the method detected approximately 48% of the ground-truth particles in individual time frames, mainly dependent on the particle size (Fig. 8). Particles that went undetected did not necessarily cause errors in the

velocity field, but did reduce the efficiency in terms of measurement time. Approximately 6% of the particle detections could not be matched to a ground-truth particle. These false detections led to errors in the velocity field if they were subsequently wrongly linked into particle trajectories. Figure 8 shows the localization error: the distance between the correct location of a ground-truth particle (at a time point in the middle of the acquisition) and the recovered location. Approximately 90% of the detected particles could be localized with an error below one voxel length (90% confidence error bound: 1.02 voxels). The localization error had a median of 0.36 voxels and increased significantly for smaller particles. We present these errors in units of voxels/frame because we may expect similar values in experiments with other voxel sizes or frame rates, as long as the particle velocities scale accordingly (and the signal-to-noise ratio remains similar).

After linking the detected particles into trajectories and removing those shorter than six time steps, 33% of the true trajectories were

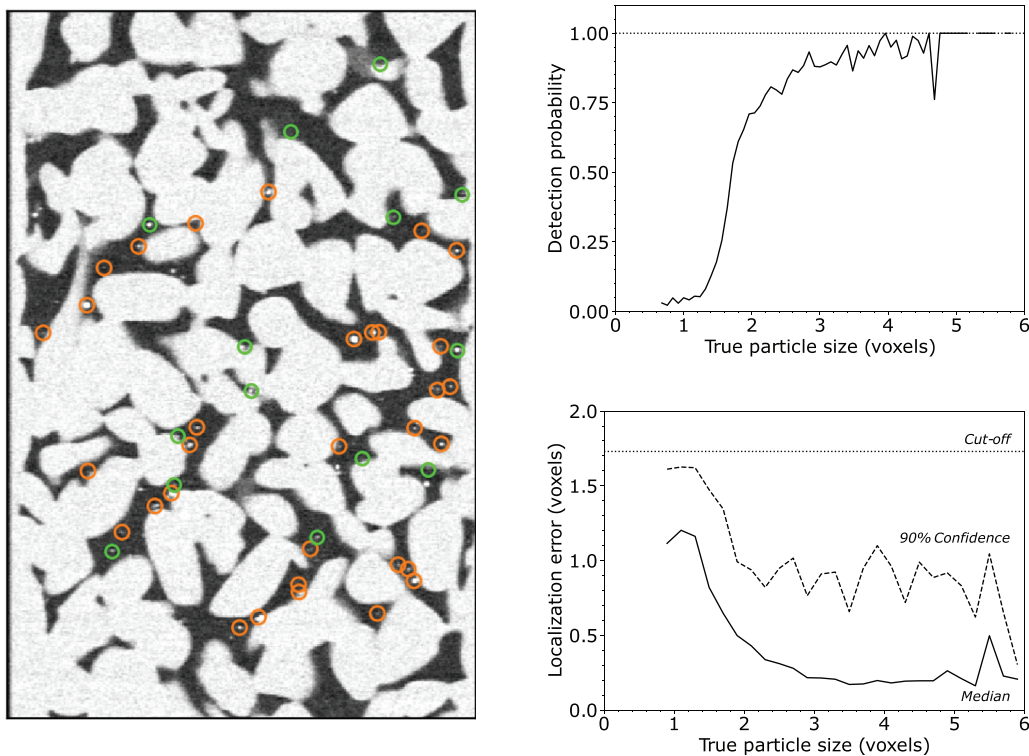


FIG. 8. On the left, a cross-sectional slice from the simulated validation dataset, showing particle detections in the same slice in green and in the neighboring slices in orange. On the right, the detection probability (top) and the localization error (bottom) of the ground-truth particles during frame-by-frame particle identification. In total, 48% of the ground-truth particles were recovered, with a median localization error of 0.36 voxels (4.25 m) from the true particle location.

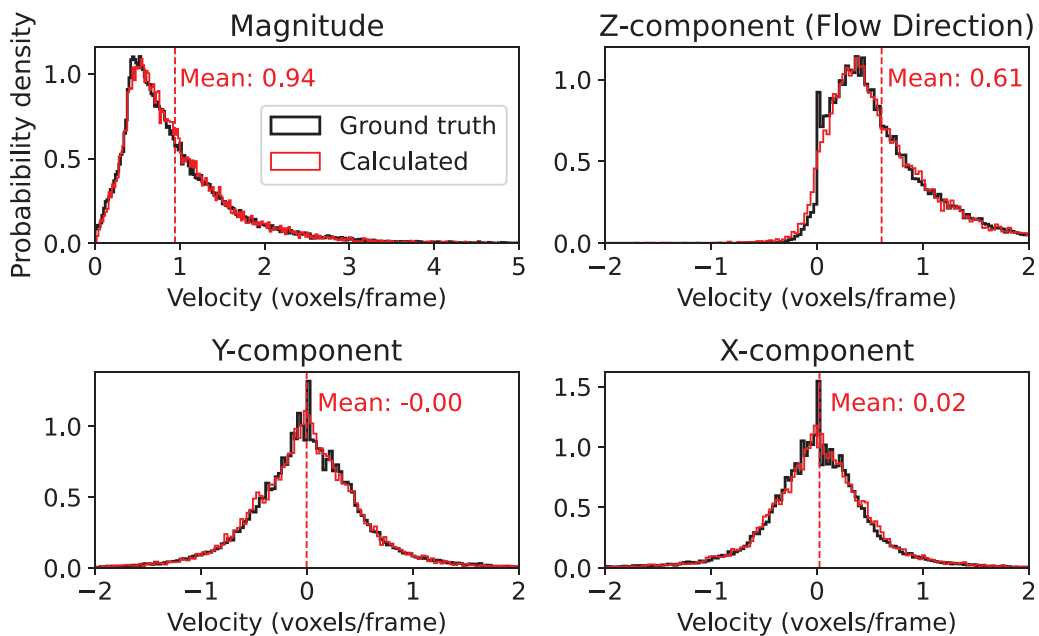


FIG. 9. Measured and ground-truth distributions of particle velocities in the simulated validation dataset showed a close match.

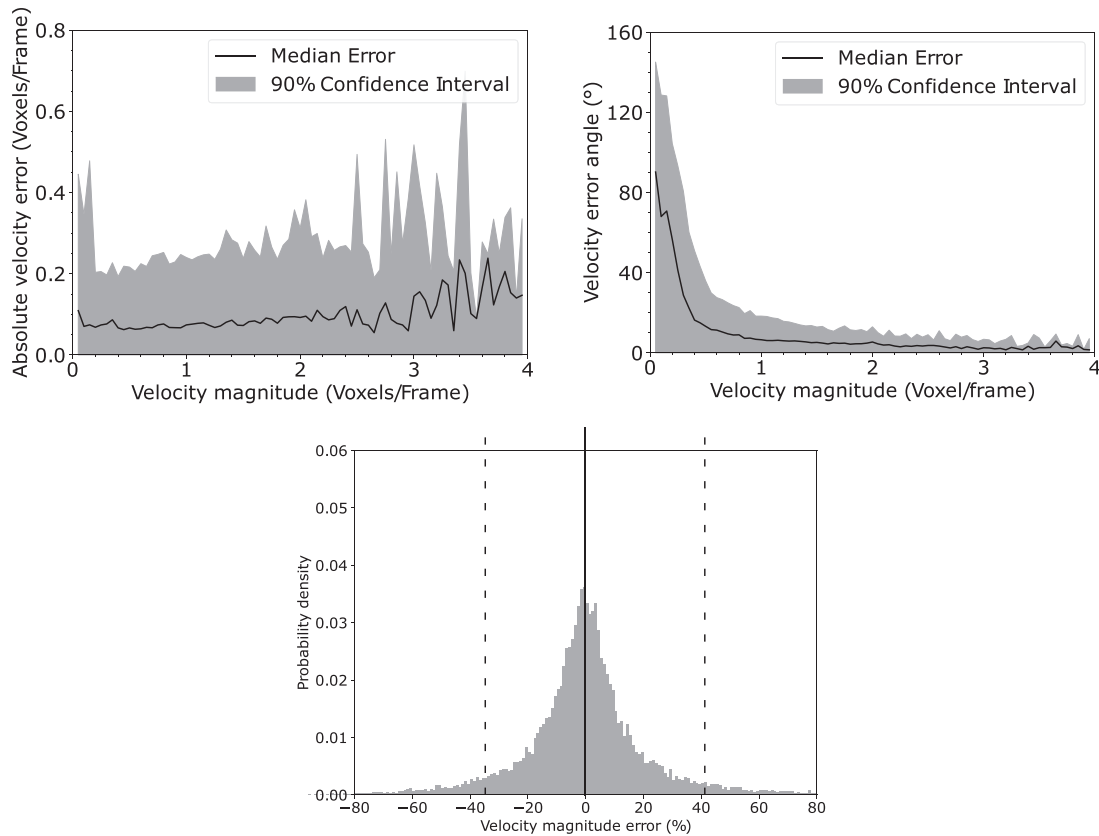


FIG. 10. Top left: point-by-point absolute velocity magnitude errors remained relatively constant below true magnitudes of 3 voxels per frame, after which they increased. Top right: there was a larger angle between the true and measured velocities for small particle displacements, i.e., at low velocity magnitudes (top right), due to the finite resolution of the images. Bottom: the histogram of the relative error on the velocity magnitude, with the 90% bounds indicated as dashed vertical lines.

retrieved, meaning that one particle was detected within $\sqrt{3}$ voxels of the same true trajectory for at least six time steps. Only 9.3% of the detected tracks did not match a true trajectory. However, most of these “false positives” were made up of two correct parts of true tracks that were wrongly linked together, meaning that they still produced at least three accurate velocity points for two incorrect ones. Less than 1% of

the detected trajectories could not be matched to 1 or 2 true trajectories. Note that a more stringent length cutoff was applied in the experiments as there were more time steps available than in the simulations, which may have resulted in more accurate linking.

Figure 9 shows that the recovered and ground-truth velocity distributions in the validation data had an excellent match. By design,

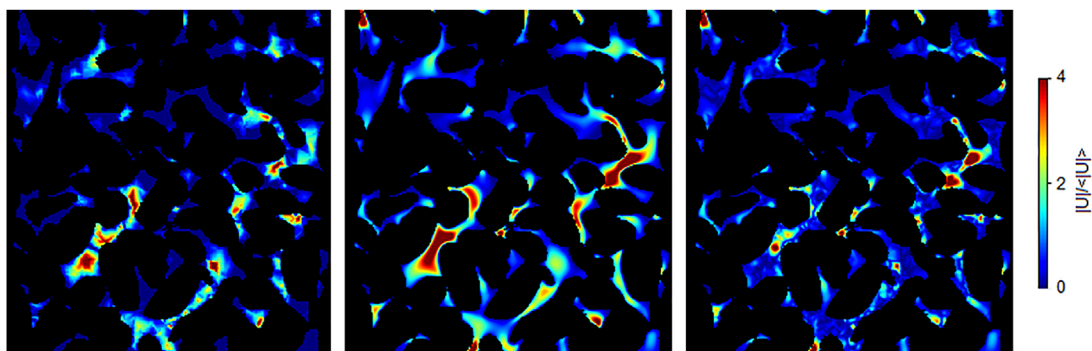


FIG. 11. In the simulated validation dataset, the recovered (left) and the simulated (middle) velocity fields showed a comparable match as in the experiments. The figure on the right shows the absolute difference between the experimental and simulated velocity fields.

these distributions were also similar to the experimental velocity magnitudes in Fig. 6, suggesting that similar motion artifacts and trajectory linking errors can be expected. In the validation data, the median absolute error on the velocity magnitude was 0.072 voxels/frame, with a 90% confidence error bound of 0.24 voxels/frame. This was smaller than the localization error before linking suggested, likely due to the rejection of low-quality detections during the length filtering, and potentially because some systematic errors in the localization may cancel out in the velocities. As shown in Fig. 10, the absolute error remained approximately constant for true velocity magnitudes below 3 voxels/frame, after which the error started to increase. There was no systematic over- or underestimation, but the measurement did show significant scatter: the relative error bounds on the velocity magnitude (90% confidence) were approximately $\pm 40\%$. The directional error, i.e., the angle between the detected and the true velocity vectors, had a median value of 8.6° and a 90% confidence bound of 30.0° . As shown in Fig. 10, the error angle was large where the velocity magnitude was below 0.5 voxels/frame, as it was difficult to accurately quantify small particle movements because of the finite resolution of the images. This was also shown by the fact that the relative error on the magnitude was larger here. However, this could be improved relatively easily, for example by skipping time steps in a particle's trajectory until it has moved more than a minimum set distance before calculating its velocity.

Finally, we show the interpolated velocity field for the validation data in Fig. 11, for the part of the image in which particles were seeded. Visually, the match to the simulated equivalent is comparable to that in the experiments from Fig. 7, indicating the suitability of the error analyses above.

IV. CONCLUSIONS

In this paper, we present the first successful use of x-ray imaging to perform 3D velocimetry on flow in porous media. We presented two experiments on creeping, single-phase flow in a sand pack and in a porous sintered glass filter, in which the paths of thousands of individual tracer particles traveling through the pore space were successfully tracked. The resulting velocity field matched well with a computational fluid dynamics simulation on the same samples. The tracer particles used here were silver-coated spheres with a mean particle size around $20\ \mu\text{m}$, suspended in a viscous liquid to slow down gravitational settling. The experiments relied on continuous CT acquisition with a voxel size of $11.8\ \mu\text{m}$ and an acquisition time of $70\ \text{s}/360^\circ$ scan, which, through an interleaved reconstruction scheme, resulted in a series of 3D images with a time (frame) interval of 35 s. The particle trajectories were identified using a relatively straightforward nearest-neighbor algorithm based on an open-source library (TrackPy).

The results were validated with the help of a digital twin of the porous glass experiment, created by numerically simulating the CT imaging of particles as they move through the pores. Due to the small particle size compared to the voxel size, approximately 50% of the simulated particles could be detected in each image. However, particles that were large enough to be detected could be localized with an accuracy below the voxel size in 90% of the cases. From the recovered particle trajectories, we were able to measure velocity magnitudes up to approximately 4 voxels/frame ($0.69\ \mu\text{m}/\text{s}$) with an error below 0.24 voxels/frame ($0.04\ \mu\text{m}/\text{s}$; 90% confidence). The recovered velocity vectors were inaccurate for small velocities (<0.5 voxels/frame) as the particle displacements per individual time frame were then too small

compared to the resolution—an issue which may be resolved by better post-processing. These validation results are expected to hold general validity toward these and other similar experiments. The main source of errors that could not be taken into account in the validation were mechanical and electronic inaccuracies of the scanner. These were deemed secondary to photon counting noise and motion artifacts for the fast imaging with relatively large voxel sizes presented here but may still have caused the errors in the experimental data to be larger than in the validation.

Our work proves the feasibility of CT-based particle velocimetry in complex geometries and suggests that there is large potential for further development and application of this method. While our measurements were limited to low flow rates, highly viscous liquids, and samples with large pores, these were not hard limitations. At synchrotron beam lines, imaging at voxel sizes up to approximately four times smaller with acquisition times 100 times faster have become routinely possible (Spurin *et al.*, 2021), meaning that velocities of up to 2 orders of magnitude larger than in this work could be measured. In both laboratory-based and synchrotron CT, the imaging can be sped up further by advanced reconstruction methods using, e.g., prior knowledge on the process (Myers *et al.*, 2011 and Eyndhoven *et al.*, 2015) and motion-compensation (Schryver *et al.*, 2018). Furthermore, the higher spatial resolutions that can be achieved using these approaches would facilitate the use of smaller and lighter tracer particles, thereby also easing the limitations on the viscosity of the liquid and on the sample's pore size. The particle detection and linking scheme applied in this paper can also still be improved using more sophisticated methods (Chenouard *et al.*, 2014). There is ample opportunity to apply all of the above concepts to CT-based velocimetry. The resulting methods could bring forth a turning point in the study of fluid dynamics in complex, microscopic geometries, ranging from porous materials to (bio-)medical applications and industrial fluid flows.

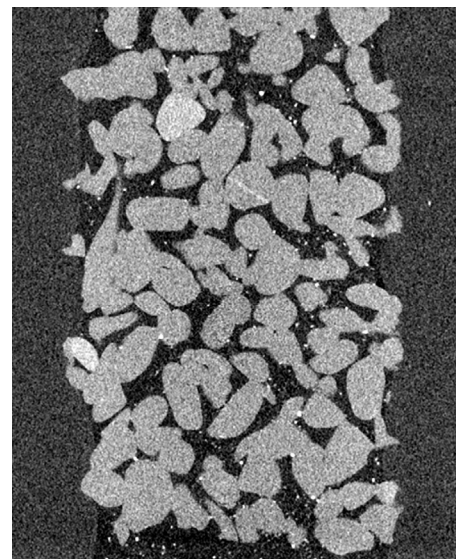


FIG. 12. A cross-sectional view of the reconstructed time frames in the porous glass experiment, showing brightly colored tracer particles. Multimedia view: <https://doi.org/10.1063/5.0088000.1>

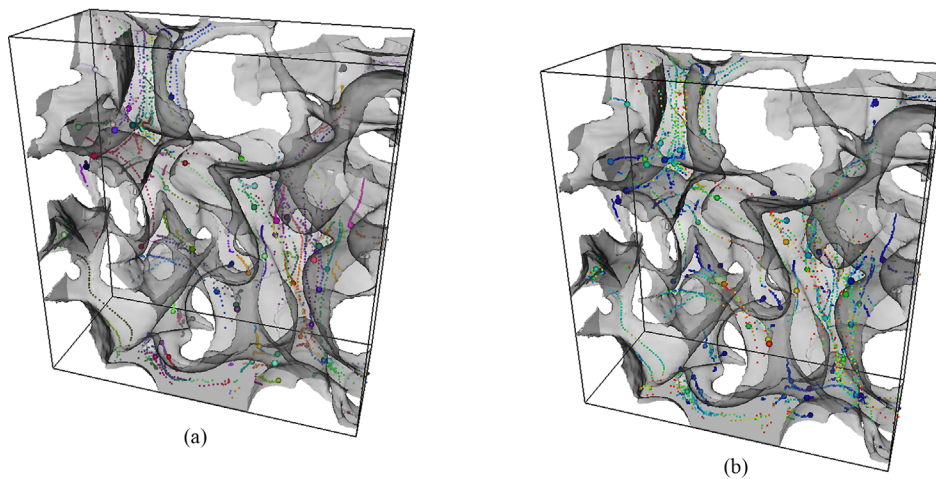


FIG. 13. Particles moving along their tracks in a detail of the porous glass dataset. In figure (a), each individual particle is assigned a random color. In figure (b), the color scale reflects the velocity magnitude in each point. Multimedia views: <https://doi.org/10.1063/5.0088000.2>; <https://doi.org/10.1063/5.0088000.3>

ACKNOWLEDGMENTS

Dr. I. Meyer (Ghent University) is thanked for her help with measuring the tracer particle size distribution. S. Berg and co-workers at Shell are thanked for inspiring discussions around velocimetry in porous media. T. Bultreys holds a senior postdoctoral fellowship from the Research Foundation Flanders (FWO) under Grant No. 12X0922N. This research was also partially funded under the Strategic Basic Research Program MoCCa-CT (No. S003418N) and the Junior Research Project program (No. 3G036518) of the Research Foundation—Flanders.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

DATA AVAILABILITY

The data that support the findings of this study are freely available from Zenodo. This includes the full experimental datasets containing the 3D time frames and the resulting particle trajectory data and velocity fields:

- Sand pack experiment: <http://doi.org/10.5281/zenodo.6010425>
- Porous glass experiment: <http://doi.org/10.5281/zenodo.6010490>
- Validation simulations: <http://doi.org/10.5281/zenodo.6010914>

APPENDIX: VIDEOS OF PARTICLE TRACKING EXPERIMENTS

To show how tracer particles moved smoothly through the pores during the velocimetry experiments, a video of the central vertical cross-sectional slice (parallel to the flow direction) in each time frame of the porous glass experiment is provided in Fig. 12 (multimedia view). The identification of trajectories on this dataset led to the videos shown in Figs. 13(a) (multimedia view) and 13(b) (multimedia view), showing details from the full dataset, where trajectories were colored by particles or by local velocity magnitude.

REFERENCES

- Allan, D. B., Caswell, T., Keim, N. C., van der Wel, C. M., and Verweij, R. W., “Soft-matter/trackpy: Trackpy v0.5.0,” (Zenodo, 2021)
- An, S., Sahimi, M., Shende, T., Babaei, M., and Niasar, V., “Enhanced thermal fingering in a shear-thinning fluid flow through porous media: Dynamic pore network modeling,” *Phys. Fluids* **34**, 023105 (2022).
- Baker, J., Guillard, F., Marks, B., and Einav, I., “X-ray rheography uncovers planar granular flows despite non-planar walls,” *Nat. Commun.* **9**, 1–9 (2018).
- Berg, S., Ott, H., Klapp, S. A., Schwing, A., Neiteler, R., Brussee, N., Makurat, A., Leu, L., Enzmann, F., Schwarz, J.-O., Kersten, M., Irvine, S., and Stampanoni, M., “Real-time 3D imaging of Haines jumps in porous media flow,” *Proc. Natl. Acad. Sci.* **110**, 3755–3759 (2013).
- Blunt, M. J., *Multiphase Flow in Permeable Media: A Pore-Scale Perspective* (Cambridge University Press, 2017).
- Bui, M., Adjiman, C. S., Bardow, A., Anthony, E. J., Boston, A., Brown, S., Fennell, P. S., Fuss, S., Galindo, A., Hackett, L. A., Hallett, J. P., Herzog, H. J., Jackson, G., Kemper, J., Krevor, S., Maitland, G. C., Matuszewski, M., Metcalfe, I. S., Petit, C., Puxty, G., Reimer, J., Reiner, D. M., Rubin, E. S., Scott, S. A., Shah, N., Smit, B., Trusler, J. P., Webley, P., Wilcox, J., and Dowell, N. M., “Carbon capture and storage (CCS): The way forward,” *Energy Environ. Sci.* **11**, 1062–1176 (2018).
- Bultreys, T., Boone, M. A., Boone, M. N., Schryver, T. D., Masschaele, B., Hoorebeke, L. V., and Cnudde, V., “Fast laboratory-based micro-computed tomography for pore-scale research: Illustrative experiments and perspectives on the future,” *Adv. Water Resour.* **95**, 341–351 (2016).
- Chenouard, N., Smal, I., de Chaumont, F., Maška, M., Sbalzarini, I. F., Gong, Y., Cardinale, J., Carthel, C., Coraluppi, S., Winter, M., Cohen, A. R., Godinez, W. J., Rohr, K., Kalaidzidis, Y., Liang, L., Duncan, J., Shen, H., Xu, Y., Magnusson, K. E. G., Jaldén, J., Blau, H. M., Paul-Gilloteaux, P., Roudot, P., Kervrann, C., Waharte, F., Tinevez, J.-Y., Shorte, S. L., Willemsse, J., Celler, K., van Wezel, G. P., Dan, H.-W., Tsai, Y.-S., de Solórzano, C. O., Olivo-Marin, J.-C., and Meijering, E., “Objective comparison of particle tracking methods,” *Nat. Methods* **11**, 281–289 (2014).
- Cnudde, V., and Boone, M. N., “High-resolution x-ray computed tomography in geosciences: A review of the current technology and applications,” *Earth-Sci. Rev.* **123**, 1–17 (2013).
- Crocker, J. C., and Grier, D. G., “Methods of digital video microscopy for colloidal studies,” *J. Colloid Interface Sci.* **179**, 298–310 (1996).
- Datta, S. S., Chiang, H., Ramakrishnan, T. S., and Weitz, D. A., “Spatial fluctuations of fluid velocities in flow through a three-dimensional porous medium,” *Phys. Rev. Lett.* **111**, 1–5 (2013).
- Datta, S. S., Dupin, J. B., and Weitz, D. A., “Fluid breakup during simultaneous two-phase flow through a three-dimensional porous medium,” *Phys. Fluids* **26**, 1–13 (2014a).

- Datta, S. S., Ramakrishnan, T. S., and Weitz, D. A., "Mobilization of a trapped non-wetting fluid from a three-dimensional porous medium," *Phys. Fluids* **26**, 1–22 (2014b).
- de Kort, D. W., Hertel, S. A., Appel, M., de Jong, H., Mantle, M. D., Sederman, A. J., and Gladden, L. F., "Under-sampling and compressed sensing of 3D spatially-resolved displacement propagators in porous media using APGSTE-RARE MRI," *Magn. Reson. Imaging* **56**, 24–31 (2019).
- Dierick, M., Loo, D. V., Masschaele, B., den Bulcke, J. V., Acker, J. V., Cnudde, V., and Hoorebeke, L. V., "Recent micro-CT scanner developments at UGCT," *Nucl. Instrum. Methods Phys. Res., Sect. B* **324**, 35–40 (2014).
- Discetti, S., and Coletti, F., "Volumetric velocimetry for fluid flows," *Meas. Sci. Technol.* **29**, 042001 (2018).
- Dubsky, S., Jamison, R. A., Higgins, S. P. A., Siu, K. K. W., Hourigan, K., and Fouras, A., "Computed tomographic x-ray velocimetry for simultaneous 3D measurement of velocity and geometry in opaque vessels," *Exp. Fluids* **52**, 543–554 (2012).
- Eyndhoven, G. V., Batenburg, K. J., Kazantsev, D., Nieuwenhove, V. V., Lee, P. D., Dobson, K. J., and Sijbers, J., "An iterative CT reconstruction algorithm for fast fluid flow imaging," *IEEE Trans. Image Process.* **24**, 4446–4458 (2015).
- Fouras, A., Dusting, J., Lewis, R., and Hourigan, K., "Three-dimensional synchrotron x-ray particle image velocimetry," *J. Appl. Phys.* **102**, 064916 (2007).
- Franchini, S., Charogiannis, A., Markides, C. N., Blunt, M. J., and Krevor, S., "Advances in water resources calibration of astigmatic particle tracking velocimetry based on generalized gaussian feature extraction," *Adv. Water Resour.* **124**, 1–8 (2019).
- Fu, J., Thomas, H. R., and Li, C., "Tortuosity of porous media: Image analysis and physical simulation," *Earth-Sci. Rev.* **212**, 103439 (2021).
- Gladden, L. F., and Sederman, A. J., "Recent advances in flow MRI," *J. Magn. Reson.* **229**, 2–11 (2013).
- Godinez, W. J., and Rohr, K., "Tracking multiple particles in fluorescence time-lapse microscopy images via probabilistic data association," *IEEE Trans. Med. Imaging* **34**, 415–432 (2015).
- Haffner, E. A., and Mirbod, P., "Velocity measurements of dilute particulate suspension over and through a porous medium model," *Phys. Fluids* **32**, 083608 (2020).
- Heyndrickx, M., Bultreys, T., Goethals, W., Hoorebeke, L. V., and Boone, M. N., "Improving image quality in fast, time-resolved micro-ct by weighted back projection," *Sci. Rep.* **10**, 18029 (2020).
- Holtzman, R., "Effects of pore-scale disorder on fluid displacement in partially-wettable porous media," *Sci. Rep.* **6**, 36221 (2016).
- Jaqaman, K., Loerke, D., Mettlen, M., Kuwata, H., Grinstein, S., Schmid, S. L., and Danuser, G., "Robust single-particle tracking in live-cell time-lapse sequences," *Nat. Methods* **5**, 695–702 (2008).
- Lee, S.-J., and Kim, G.-B., "X-ray particle image velocimetry for measuring quantitative flow information inside opaque objects," *J. Appl. Phys.* **94**, 3620–3623 (2003).
- Lenormand, R., Zarcone, C., and Sarr, A., "Mechanisms of the displacement of one fluid by another in a network of capillary ducts," *J. Fluid Mech.* **135**, 337 (1983).
- Ling, B., Bao, J., Oostrom, M., Battiato, I., and Tartakovsky, A. M., "Modeling variability in porescale multiphase flow experiments," *Adv. Water Resour.* **105**, 29–38 (2017).
- Mäkiharju, S. A., Dewanckele, J., Boone, M., Wagner, C., and Griesser, A., "Tomographic x-ray particle tracking velocimetry," *Exp. Fluids* **63**, 16 (2022).
- Mascini, A., Boone, M., Offenwert, S. V., Wang, S., Cnudde, V., and Bultreys, T., "Fluid invasion dynamics in porous media with complex wettability and connectivity," *Geophys. Res. Lett.* **48**, e2021GL095185, <https://doi.org/10.1029/2021GL095185> (2021).
- McClure, J. E., Berg, S., and Armstrong, R. T., "Capillary fluctuations and energy dynamics for flow in porous media," *Phys. Fluids* **33**, 083323 (2021).
- Melling, A., "Tracer particles and seeding for particle image velocimetry," *Meas. Sci. Technol.* **8**, 1406–1416 (1997).
- Mercer, J. W., and Cohen, R. M., "A review of immiscible fluids in the subsurface: Properties, models, characterization and remediation," *J. Contam. Hydrol.* **6**, 107–163 (1990).
- Miele, F., Anna, P. D., and Dentz, M., "Stochastic model for filtration by porous materials," *Phys. Rev. Fluids* **4**, 94101 (2019).
- Molnar, I. L., Johnson, W. P., Gerhard, J. I., Willson, C. S., and O'Carroll, D. M., "Predicting colloid transport through saturated porous media: A critical review," *Water Resour. Res.* **51**, 6804–6845, <https://doi.org/10.1002/2015WR017318> (2015).
- Mouli-Castillo, J., Wilkinson, M., Mignard, D., McDermott, C., Haszeldine, R. S., and Shipton, Z. K., "Inter-seasonal compressed-air energy storage using saline aquifers," *Nat. Energy* **4**, 131–139 (2019).
- Mularczyk, A., Lin, Q., Blunt, M. J., Lamibrac, A., Marone, F., Schmidt, T. J., Büchi, F. N., and Eller, J., "Droplet and percolation network interactions in a fuel cell gas diffusion layer," *J. Electrochem. Soc.* **167**, 084506 (2020).
- Myers, G. R., Kingston, A. M., Varslot, T. K., Turner, M. L., and Sheppard, A. P., "Dynamic x-ray micro-tomography for real time imaging of drainage and imbibition processes at the pore scale," in *Proceedings of the International Symposium of the Society of Core Analysts* (Society of Core Analysts, 2011).
- Ouellette, N. T., Xu, H., and Bodenschatz, E., "A quantitative study of three-dimensional Lagrangian particle tracking algorithms," *Exp. Fluids* **40**, 301–313 (2006).
- Primkulov, B. K., Pahlavan, A. A., Fu, X., Zhao, B., MacMinn, C. W., and Juanes, R., "Signatures of fluid-fluid displacement in porous media: Wettability, patterns and pressures," *J. Fluid Mech.* **875**, R4 (2019).
- Raeini, A., and Blunt, M., *Imperial College London Pore-Scale Modelling and Imaging GitHub Page* (Imperial College London, 2022); available at <https://github.com/ImperialCollegeLondon/porescale>.
- Raeini, A. Q., Bijeljic, B., and Blunt, M. J., "Generalized network modeling: Network extraction as a coarse-scale discretization of the void space of porous media," *Phys. Rev. E* **96**, 013312 (2017).
- Raffel, M., Willert, C., Wereley, S. T., and Kompenhans, J., *Particle Image Velocimetry* (Berlin, Heidelberg: Springer Berlin Heidelberg, 2007).
- Roman, S., Soulaire, C., AlSaud, M. A., Kovscek, A., and Tchelepi, H., "Particle velocimetry analysis of immiscible two-phase flow in micromodels," *Adv. Water Resour.* **95**, 1–13 (2015).
- Russell, T., and Bedrikovetsky, P., "Boltzmann's colloidal transport in porous media with velocity-dependent capture probability," *Phys. Fluids* **33**, 053306 (2021).
- Saxena, N., Hofmann, R., Alpak, F. O., Berg, S., Dietrich, J., Agarwal, U., Tandon, K., Hunter, S., Freeman, J., and Wilson, O. B., "References and benchmarks for pore-scale flow simulated using micro-CT images of porous media and digital rocks," *Adv. Water Resour.* **109**, 211–235 (2017).
- Schanz, D., Gesemann, S., and Schröder, A., "Shake-the-box: Lagrangian particle tracking at high particle image densities," *Exp. Fluids* **57**, 1–27 (2016).
- Schryver, T. D., Dierick, M., Heyndrickx, M., Stappen, J. V., Boone, M. A., Hoorebeke, L. V., and Boone, M. N., "Motion compensated micro-CT reconstruction for in-situ analysis of dynamic processes," *Sci. Rep.* **8**, 7655 (2018).
- Segur, J. B., and Oberstar, H. E., "Viscosity of glycerol and its aqueous solutions," *Ind. Eng. Chem.* **43**, 2117–2120 (1951).
- Singh, K., Jung, M., Brinkmann, M., and Seemann, R., "Capillary-dominated fluid displacement in porous media," *Annu. Rev. Fluid Mech.* **51**, 429–449 (2019).
- Spurin, C., Bultreys, T., Rücker, M., Garfi, G., Schlepütz, C. M., Novak, V., Berg, S., Blunt, M. J., and Krevor, S., "The development of intermittent multiphase fluid flow pathways through a porous rock," *Adv. Water Resour.* **150**, 103868 (2021).
- Takamura, K., Fischer, H., and Morrow, N. R., "Physical properties of aqueous glycerol solutions," *J. Pet. Sci. Eng.* **98–99**, 50–60 (2012).
- Wildenschild, D., and Sheppard, A. P., "X-ray imaging and analysis techniques for quantifying pore-scale structure and processes in subsurface porous medium systems," *Adv. Water Resour.* **51**, 217–246 (2013).
- Ye, T., Pan, D., Huang, C., and Liu, M., "Smoothed particle hydrodynamics (SPH) for complex fluid flows: Recent developments in methodology and applications," *Phys. Fluids* **31**, 011301 (2019).
- Zarikos, I., Terzis, A., Hassanizadeh, S. M., and Weigand, B., "Velocity distributions in trapped and mobilized non-wetting phase ganglia in porous media," *Sci. Rep.* **8**, 13228 (2018).
- Zhang, C., Kaito, K., Hu, Y., Patmonoaji, A., Matsushita, S., and Suekane, T., "Influence of stagnant zones on solute transport in heterogeneous porous media at the pore scale," *Phys. Fluids* **33**, 036605 (2021).
- Zhao, B., MacMinn, C. W., Primkulov, B. K., Chen, Y., Valocchi, A. J., Zhao, J., Kang, Q., Bruning, K., McClure, J. E., Miller, C. T., Fakhari, A., Bolster, D., Hiller, T., Brinkmann, M., Cueto-Felgueroso, L., Cogswell, D. A., Verma, R., Prodanović, M., Maes, J., Geiger, S., Vassvik, M., Hansen, A., Segre, E., Holtzman, R., Yang, Z., Yuan, C., Chareyre, B., and Juanes, R., "Comprehensive comparison of pore-scale models for multiphase flow in porous media," *Proc. Natl. Acad. Sci.* **116**, 13799–13806 (2019).